


## THE FINAL SOLUTION FOR SEALING BUILDINGS

Very fast, efficient, economical and environmentally friendly.



### CERTIFIED PROPERTIES

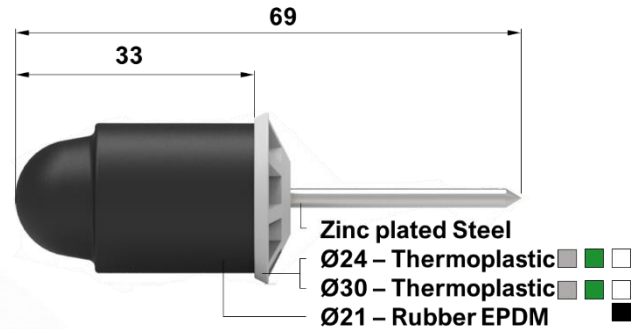

Even with ageing, the product properties are also maintained unchanged.



Water resistance under 3 bar pressure at  $\phi_i=22\text{mm}$ .



Same sound insulation as a wall without cavities.



Fire resistance better than EI - 240.



Radon gas tightness higher than required by standards ( $3,70 < R < 6,51$ ).



Withstands more than 180 kg thrust without any shifting at  $\phi_i=25\text{mm}$ .

**Note:**


- The RiveStop unit was mounted on the inside of the tank when the pressure was measured. See figure.
- $\phi_i$  = Inner diameter of the opening to be sealed.
- Laboratory certificates available.
- Data sheet for RS21033PZ24 and RS21033PZ30




### Very fast installation: sealing of up to 420 holes/hour



Inserting RiveStop into the Riveter

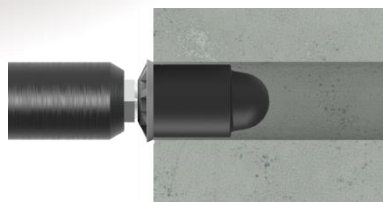

Insert into the opening to be sealed.

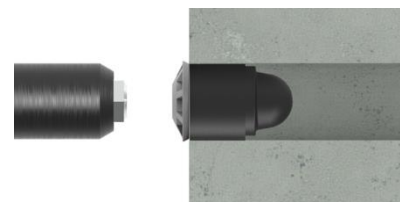

Rivet until the mandrel comes loose.